




ORM 3 SL 12 S

ORM 3 SH 24 S

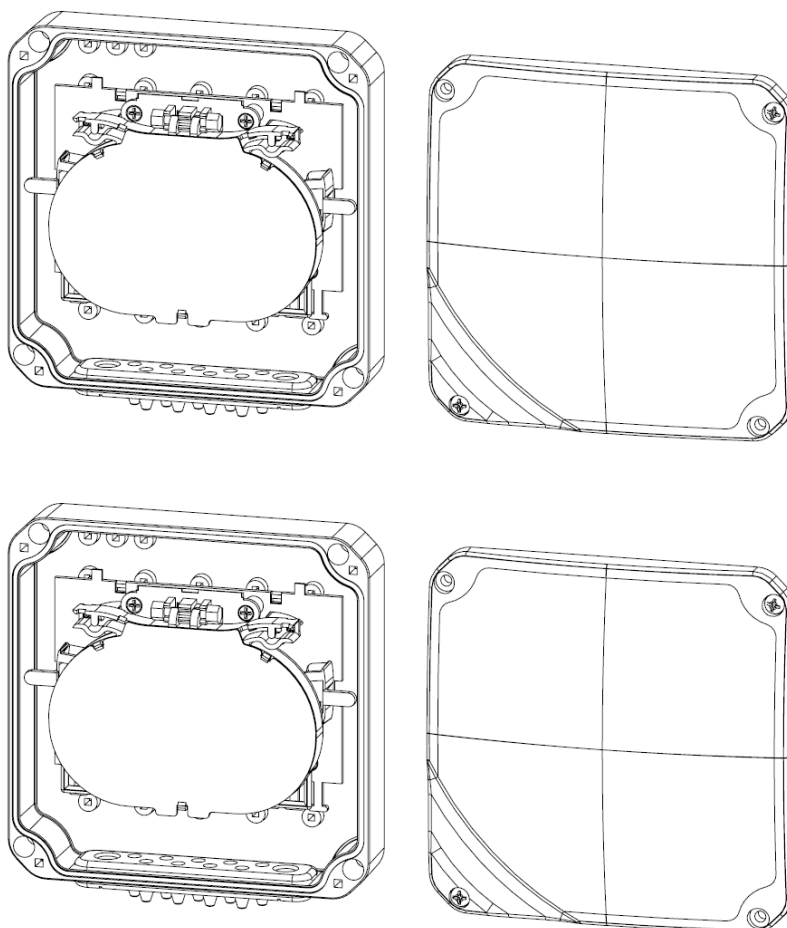

Contact:

MICOS TELCOM s.r.o.

Háj 365

798 12 Kralice na Hané, Czech Republic

tel.: +420 582 307 511

E-Mail: telcom@micos.cz; www.micostelcom.com

493102



GB

Technical description:

ORM 3 SL 12 S/ ORM 3 SH 24 S is an optical cabinet for storing and connecting optical cables in an outdoor environment. The rack can be supplemented by adjusting frame that will allow an increase in capacity.

Type: ORM 3 SL 12 S/ ORM 3 SH 24 S
Inputs and outputs: 1x rubber bushing
Dimensions: 136x144x45/ 136x144x64mm
Weight: 0.4/ 0.5kg

Accessories:

Accessory bag 1pc

Declaration on product conformance:

The product was manufactured in compliance with valid technical documentation. An observation of designed technology procedures and material was followed according to the ISO 9001 standard.

Warranty:

The manufacturer guarantees for product imperfections arising within period of warranty due to the demonstrably deficient material, error in design, or deficiencies in manufacture. Such deficiencies shall be repaired by the manufacturer free of charge. The manufacturer is authorized to reject the complaint if the item was demonstrably damaged due to an unqualified infringement, rough manipulation, or by force majeure. The warranty period is 24 months (if not stated other way) starting from the date of product consignment to the customer. The warranty covers the product capability and conformance with agreed, or usual purpose.

Note:


The product design may vary according to the requirement of the customer. The weight of single product execution may vary. Manufacturer is authorised to develop its products according to the requirements of the customer. Recording of all developing changes in this document is not necessary. Picture is only informative.






Assembly procedure:

1. After unpacking, install the grommet (see attached). On the upper edge of the grommet around the periphery apply lubricant. Image is for illustrative purposes only.

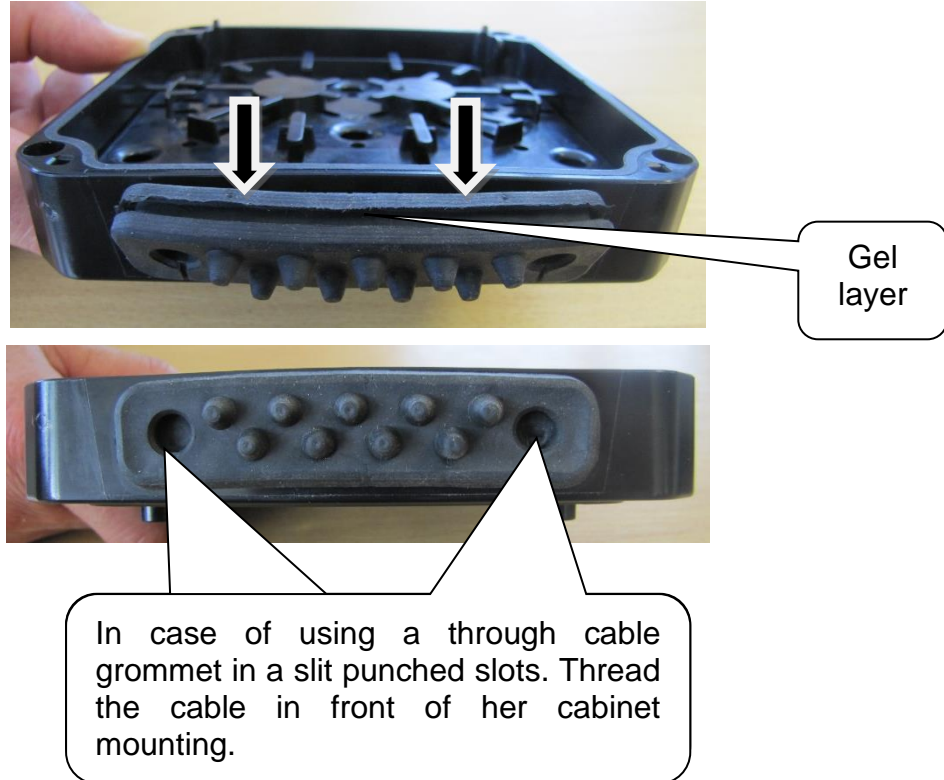


2. Before mounting the enclosure wall, remove the lid and frame. Image is for illustrative purposes only.


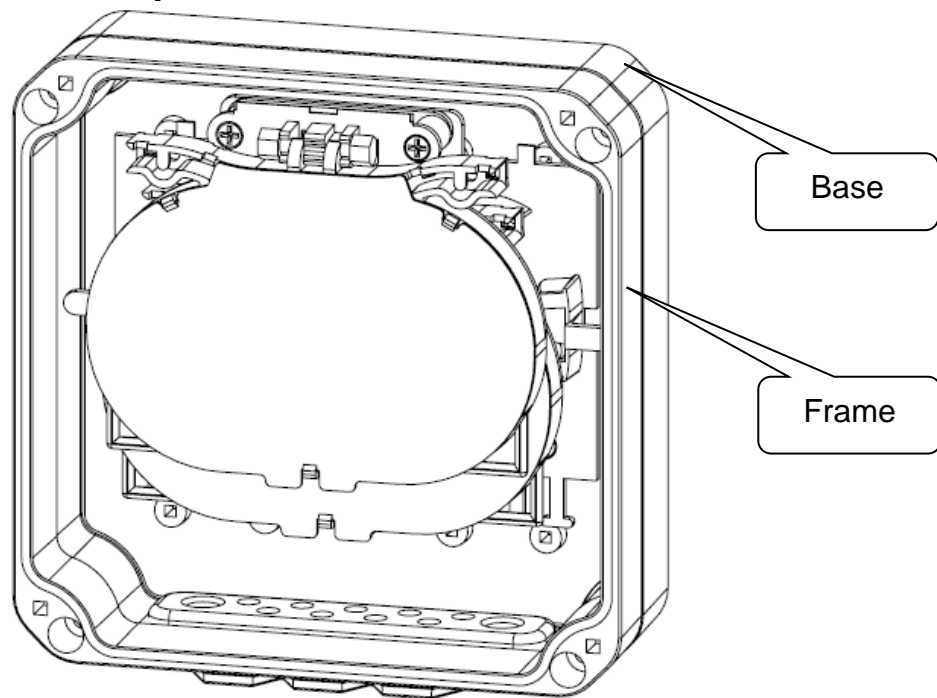




3. Attach the cabinet to the desired place with four screws (see attached). Image is for illustrative purposes only.

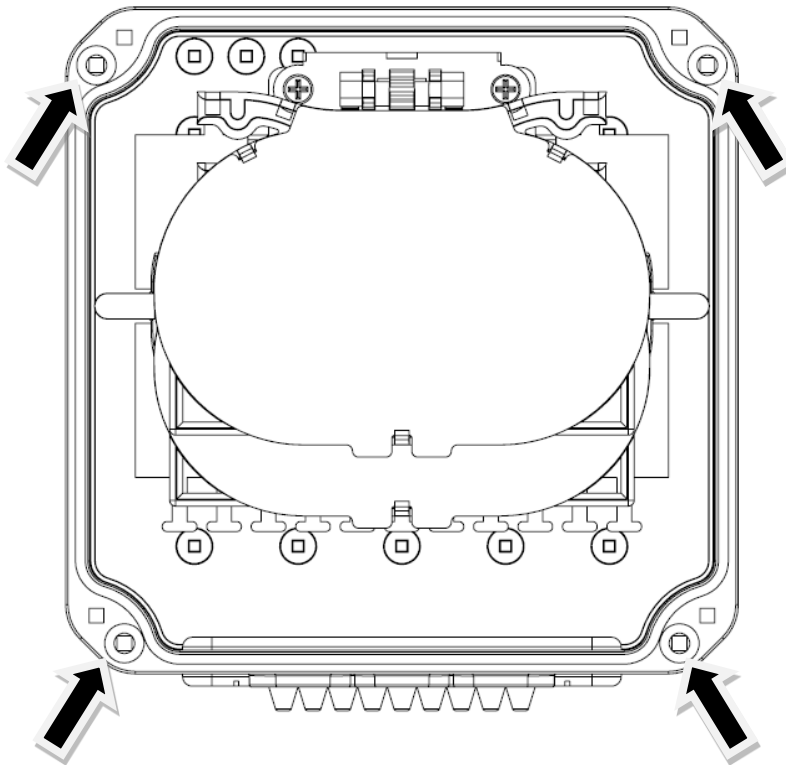


4. Bushings, insert cables or protective tube into the cabinet and attach the fastener band (see attached). Image is for illustrative purposes only.

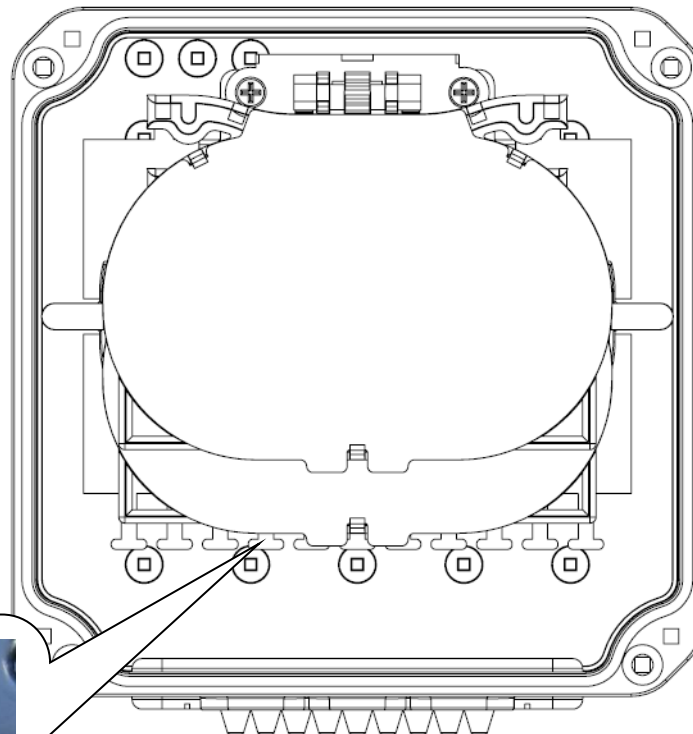





5. Saving reserves or micro-fiber bundle. Reserve bundle of fibers or micro store according to the scheme (max. Total length is 30m reserves fibers $\varnothing 0,9\text{mm}$). Use fiber compliant with ITU-T G.657A. Image is for illustrative purposes only.


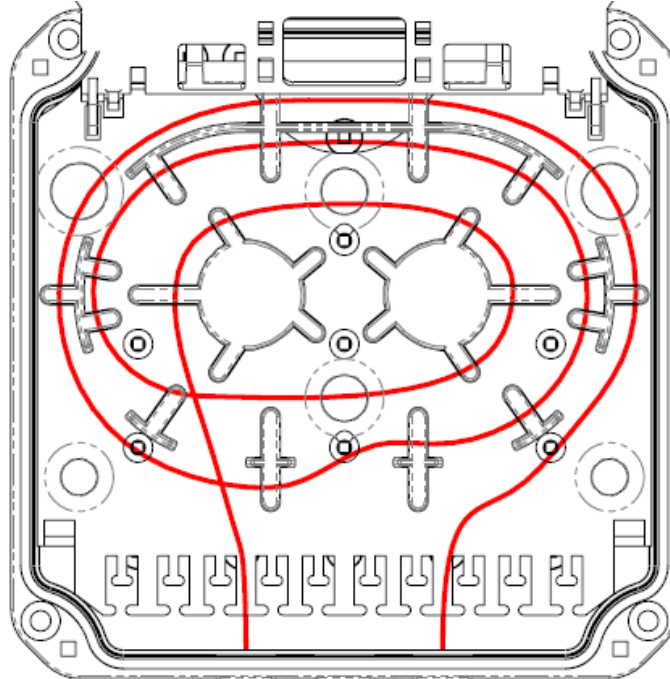


6. Linking optical fibers and splicing. Input and output fibers insert into the cassette according to the diagram. Use fiber compliant with ITU-T G.657A. Image is for illustrative purposes only.

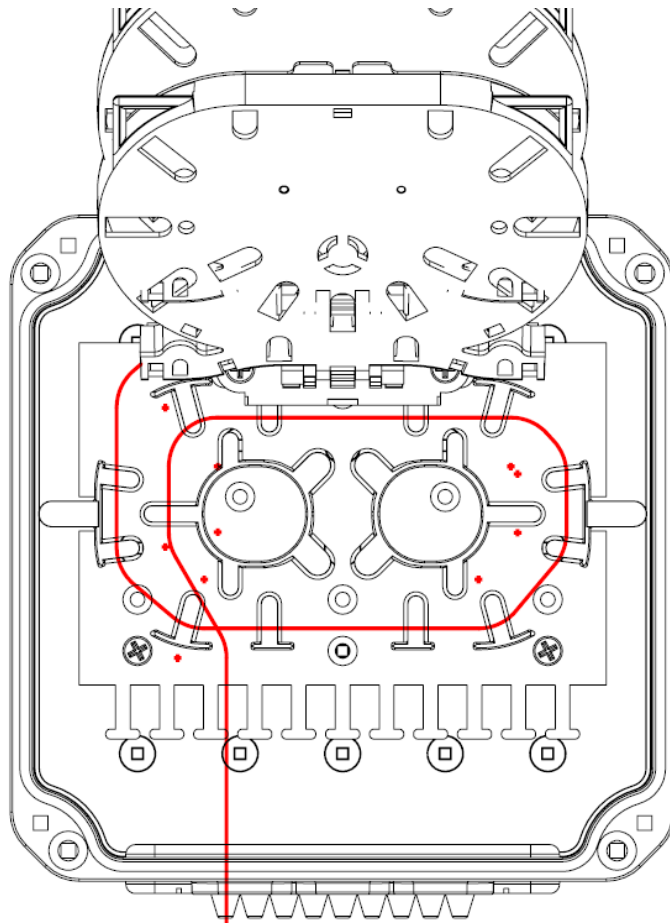

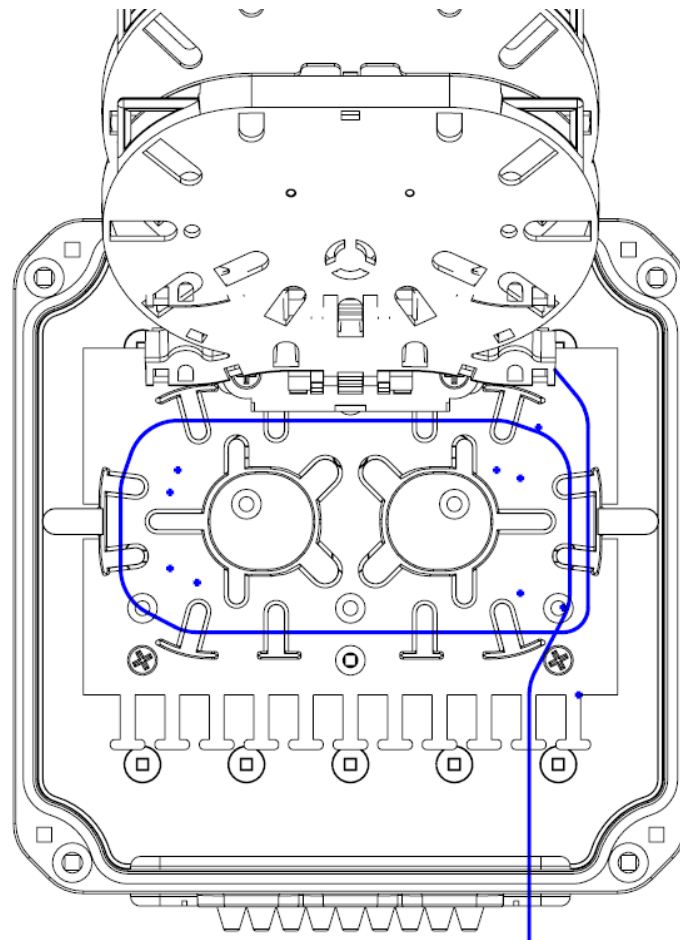


7. On the rack mount panel with four screws (see attached). ORM 3 SL 12 S.
Image is for illustrative purposes only.

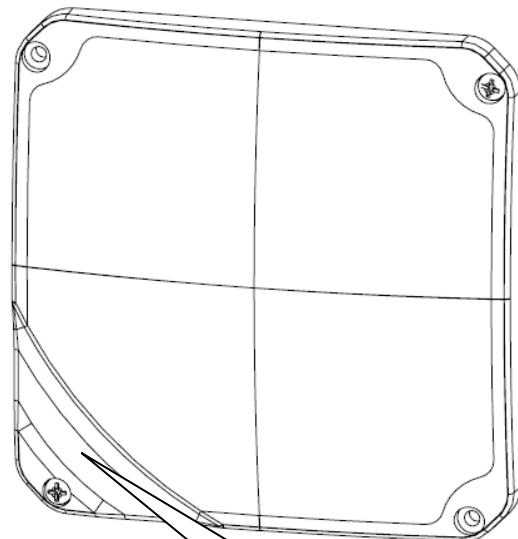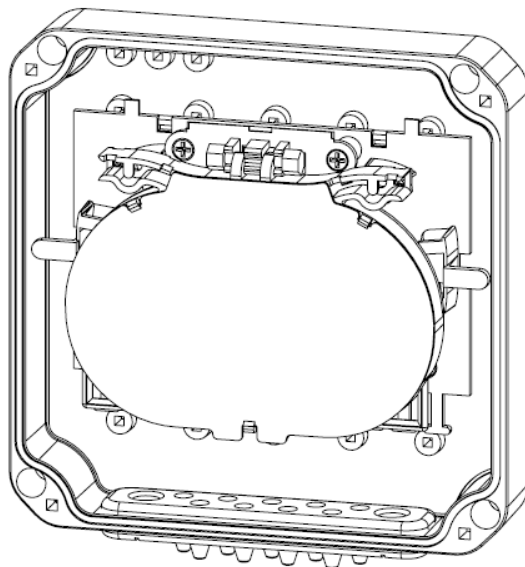

**Attention to
the correct
orientation of
the lid!**



8. On the rack mount panel with four screws (see attached). ORM 3 SH 24 S.
Image is for illustrative purposes only.

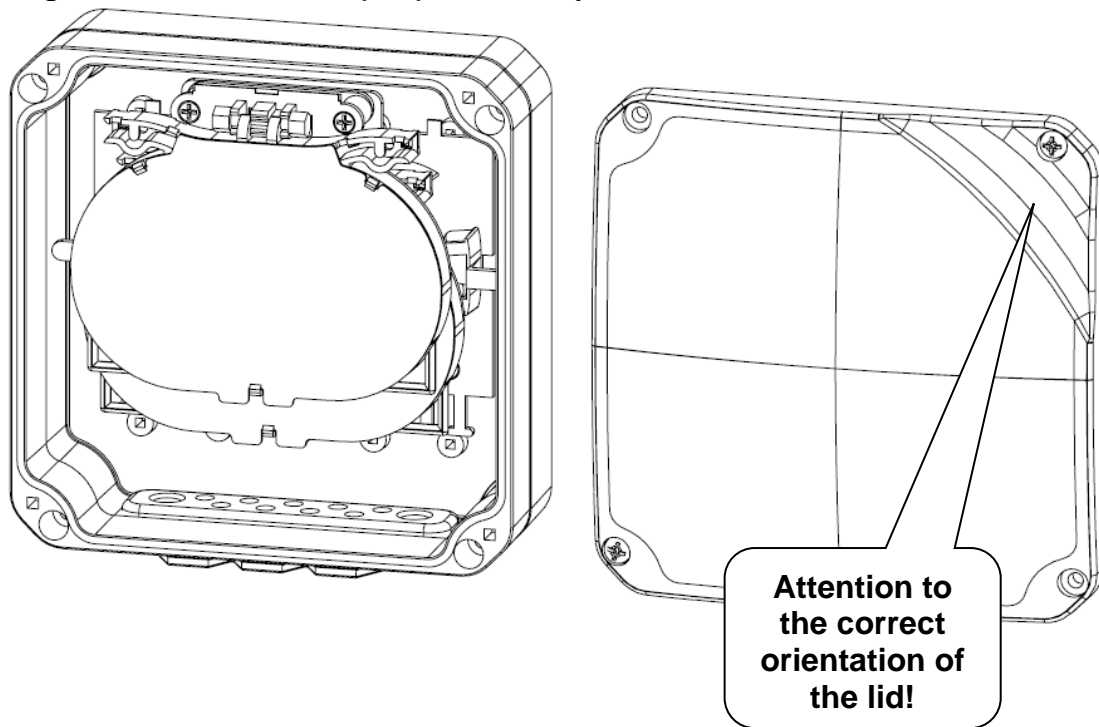

9. The operations specified in paragraphs 1–8 may only be performed by an authorised technician.

