




ORM 2

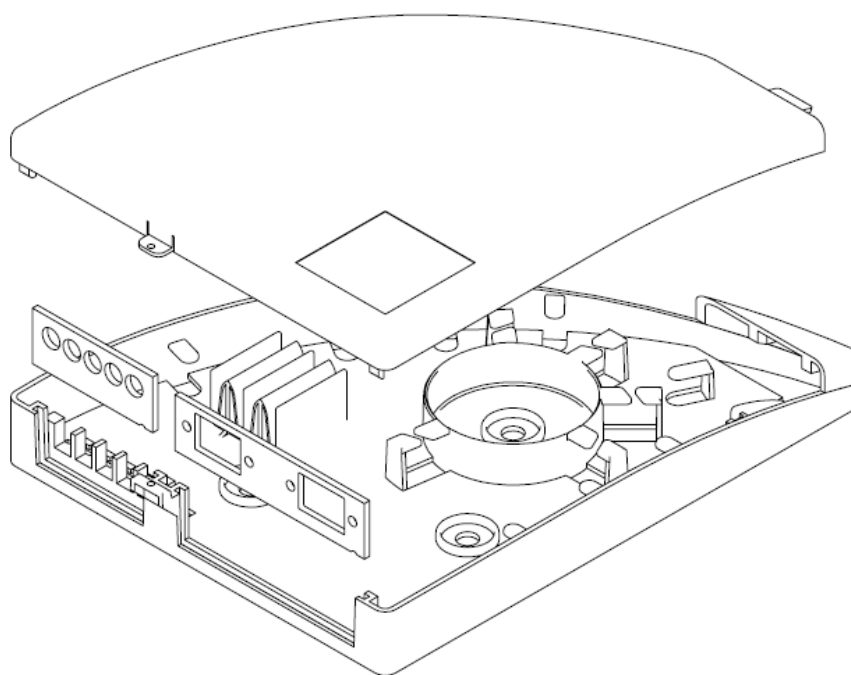

Contact:

MICOS TELCOM s.r.o.

Háj 365

798 12 Kralice na Hané, Czech Republic

tel.: +420 582 307 511

E-Mail: telcom@micos.cz; www.micostelcom.com

491198



GB

Technical description:

The ORM 2 optical distribution box is designed to house two optical connectors for the termination of an optical network at a site, or to interconnect optical cables. The distribution box may be used for connecting computers, different peripherals or other equipment using connecting cables. It is suitable for use wall-mounted indoors. The distribution box offers input and output options depending on the interchangeable panels supplied.

Type:	ORM 2	
Inputs and outputs:	Interchangeable panels:	Microduct ø5mm Microduct ø3mm Optical cables max. ø5mm 2x FC 2x E2000 2x SC/LC 1x SC DUPLEX 2x ST

Dimensions: 140x109x23mm

Weight: c. 0.1kg

Accessories:

PVC fastening tape 2.5x100mm	6pcs
Dowel pins	2pcs
Wood screws	2pcs

Declaration on product conformance:

The product was manufactured in compliance with valid technical documentation. An observation of designed technology procedures and material was followed according to the ISO 9001 standard.

Warranty:

The manufacturer guarantees for product imperfections within period of warranty due to the demonstrably deficient material, error in design, or deficiencies in manufacture. Such a deficiencies shall be repaired by the manufacturer free of charge. The manufacturer is authorized to reject the complaint if the item was demonstrably damaged due to an unqualified infringement, rough manipulation, or by force majeure. The warranty period is 24 months (if not stated other way) starting from the date of product consignment to the customer. The warranty covers the product capability and conformance with agreed, or usual purpose.

Note:


The product design may vary according to the requirement of the customer. The weight of single product execution may vary. Manufacturer is authorised to develop its products according to the requirements of the customer. Recording of all developing changes in this document is not necessary. Picture is only informative.






Assembly procedure:


1. ORM 2 components.

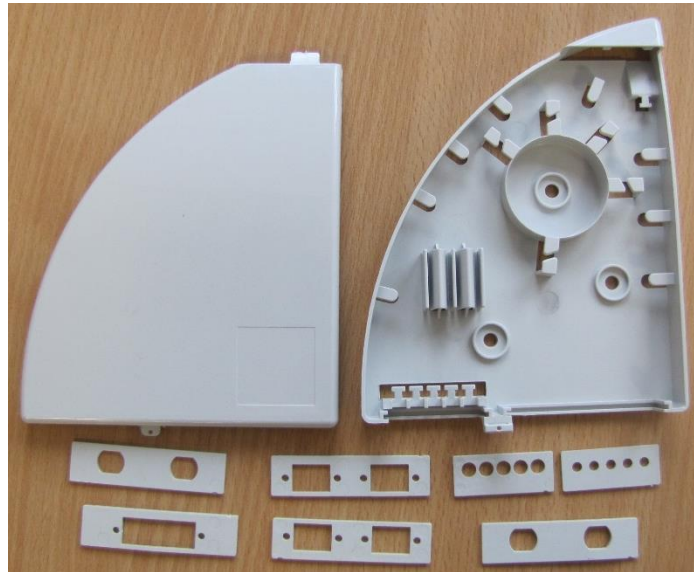

2. Remove the cover.

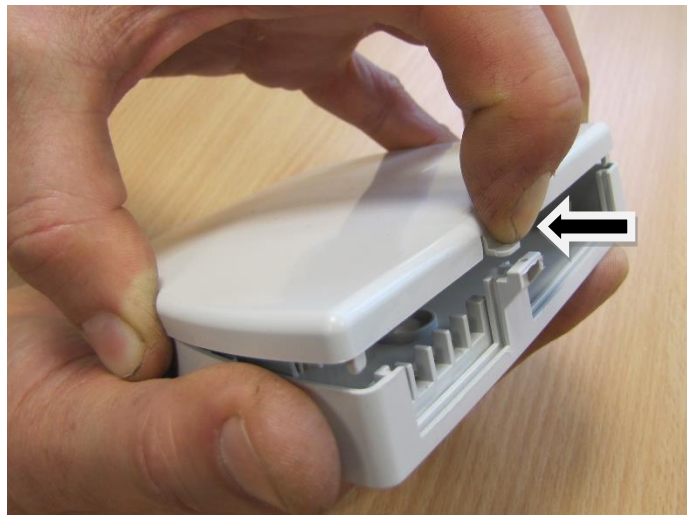


3. Fix the base with 2 screws.

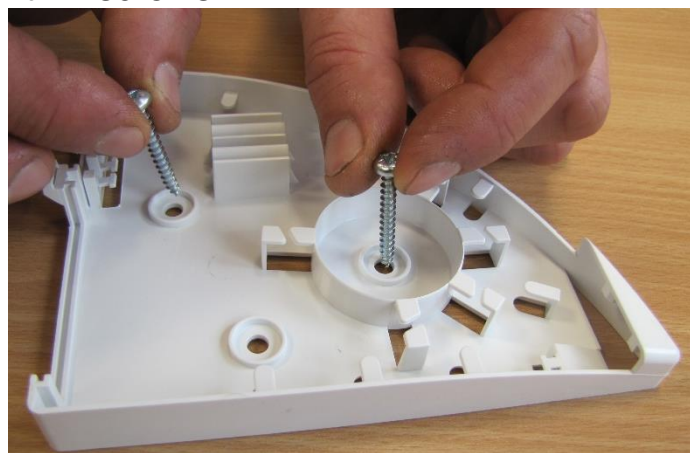





4. Choose suitable panel for incoming micro-tube or micro-cable and slide it into a bottom part of ORM2.

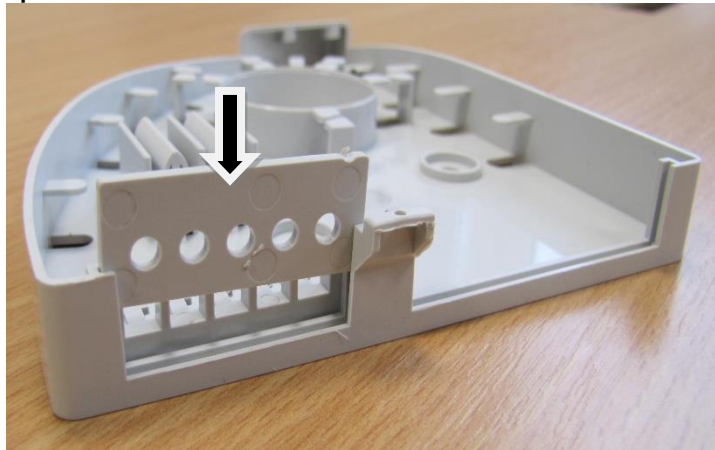

5. Choose suitable panel for connector(s). Click or screw required adapter and slide it into a bottom of ORM2.

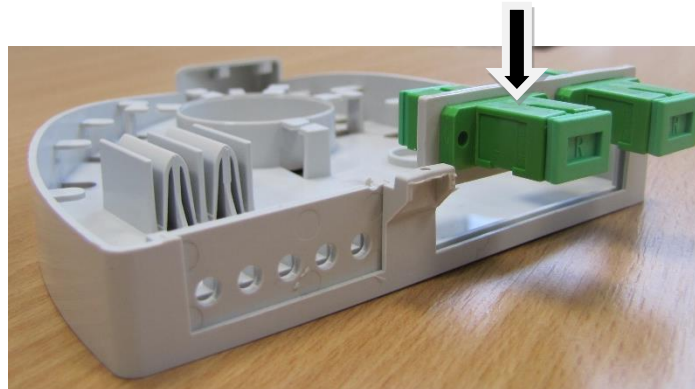

6. Fix the incoming micro-tube or micro-cable using a cable tie.

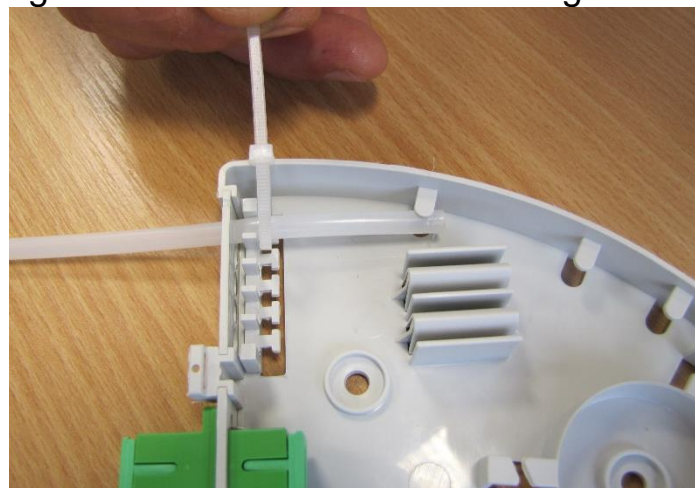





7. Using an appropriate tool, remove the external sheathing from the cable end and clean the gel, if any, along at least 2 m.



8. Comply with min. band radius. Splice the fibres using 40mm heat shrink protectors. Fix the heat shrink splices into a splice holder.

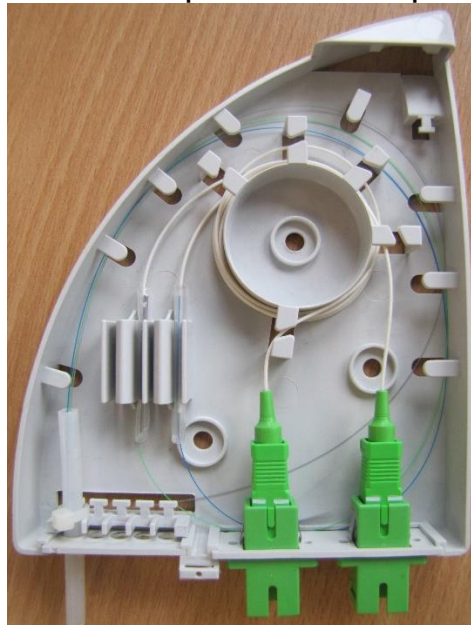

9. Fit the cover back.

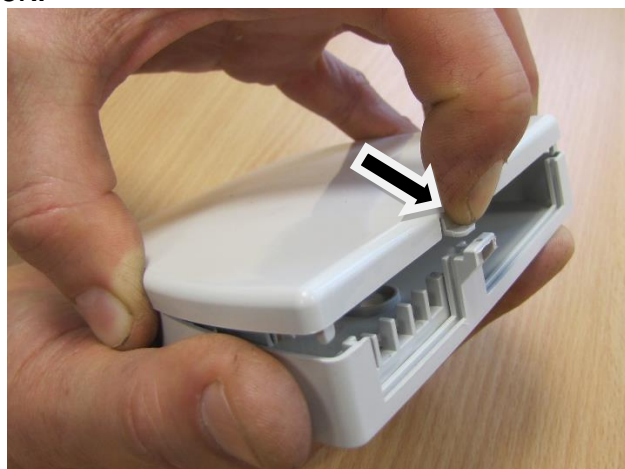

10. The operations specified in Paragraphs 1-9 should only be performed by an authorised technician.

