

Product Datasheet

P-PACK UNDERDESK UNITS

With Cat 6 data assemblies



PRODUCT DESCRIPTION

Underdesk power units with individually fused UK sockets, and Cat 6 data assemblies

- Individually fused power sockets
- Complies with BS6396:2022
- 150mm earth lead to ring terminal
- BS5733 3rd party approval
- 3 pole connector input
- Cat 6 data assemblies, patch in the top and out of the end
- Option of USB A+C charger


STANDARD PRODUCTS

Part Code	Description	Dimensions
P-Pack 2/2DC	2 x 5A UK sockets, 2 x Cat 6 assemblies	228 x 62 x 43mm
P-Pack 4/2DC	4 x 5A UK sockets, 2 x Cat 6 assemblies	358 x 62 x 43mm
P-Pack 6/2DC	6 x 3.15A UK sockets, 2 x Cat 6 assemblies	488 x 62 x 43mm
P-Pack 2/2DCU	2 x 5A UK sockets, 2 x Cat 6 assemblies, USB charger	270 x 62 x 43mm
P-Pack 4/2DCU	4 x 5A UK sockets, 2 x Cat 6 assemblies, USB charger	400 x 62 x 43mm
P-Pack 6/2DCU	6 x 3.15A UK sockets, 2 x Cat 6 assemblies, USB charger	530 x 62 x 43mm

INSTALLATION

Underdesk units can be installed either into a wire basket cable management system, or directly to the under desk.

The unit has mounting brackets either end for either cable tying to a basket or screwing directly to a desk.

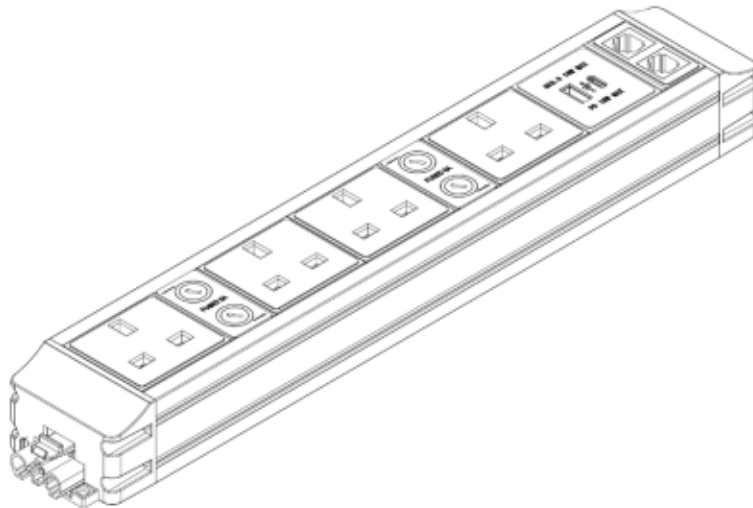

USAGE & MAINTENANCE

Not to be used with products and appliances exceeding the rating of the socket (5A for a 2-way and 4-way, 3.15A for a 6-way)

Fuses are 5x20mm and can be user-replaced.

To replace a fuse, disconnect the unit from the mains first.

To clean unit, disconnect from the mains, and wipe with a clean damp cloth

TECHNICAL SPECIFICATION

Construction	PVC extrusion, PVC sockets and fascias
Max voltage	250V
Fuse rating	3.15A or 5A
Fuse size/type	5x20mm ceramic slow blow
Mains connector	20A male 3-pole connector
USB	USB output type A and type C, Max 18W USB A: QC3.0, DC 5V3A, 9V2A, 12V1.5A USB C: PD, DC5V3A, 9V2A, 12V1.5A A+C together, DC5V3.4A
Conformities	BS 1363; BS 6396:2008; BS 5733; IEC60884-1:2006; UL 94V-0
Compliances	RoHS; WEEE; CE; UKCA