

GigaDuct - Fibre Raceway System


Split Flexible Conduit

Application/Product Description

Split flexible conduit used in conjunction with outlet adaptors, is easy to install and used to protect fibre routing from drops into racks and cabinets.

Features and Benefits:

- Compatible with GigaDuct split conduit outlet adaptors
- Provides additional cable protection
- Simplifies cable management
- Increases installation aesthetics

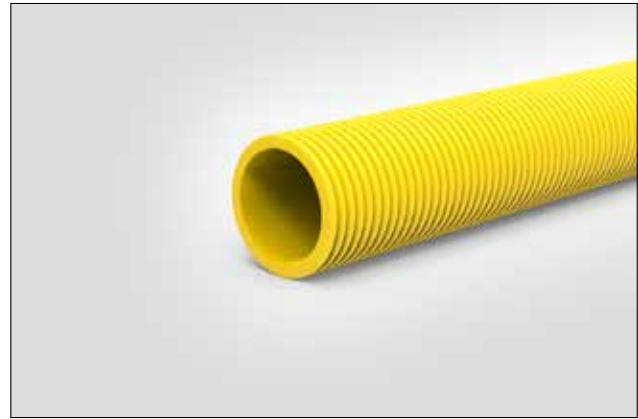

32mm Split flexible conduit.



Technical Specifications:

Product Type: Conduit

Colour: Yellow

Material: Halogen-free

Material Standards:

- EN 61249-2-21, IEC 61249-2-21: Non-halogenated Material
- EN 60695-11-10, IEC 60695-11-10: Fire hazard testing
- UL94/V0 plastic flame-retardant
- Directive 2015/65/EU RoHS Compliant
- EC 1907/2006 REACH Compliant
- Suitable for riser and general-purpose applications


Performance Standards:

- EN 62368-1, IEC 62368-1: Safety Standard
- ANSI/TIA-942-B, Telecommunications Infrastructure Standard for Data Centres
- ANSI/TIA-569-B, Commercial Building Standard for Telecommunications Pathways and Spaces
- ANSI/UL 2024, Cable Routing Assemblies and Communications Raceways
- CAN/ULC-S143, Standard Method of Fire Tests for Non-Metallic Electrical and Optical Fibre Cable Raceway Systems
- NFPA 70 National Electrical Code (NEC)
- CSA C22.1 Canadian Electrical Code Part 1

PART CODE	Width (W)	Length (L)	UNS
LG-32-YL	32	5000	181-00434

All measurements are in mm unless otherwise stated.

Technical Diagrams:

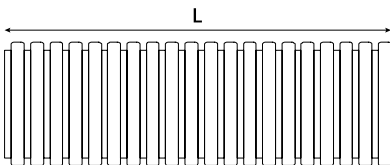

Front View