


Conlok Conduit Fittings

Simple & Fast !!!

The Conlok conduit box is to all intents a standard conduit box, with a 20mm or 25mm clearance inlet, replacing the typically threaded inlet, with the conduit being accepted and mechanically locked to the conduit by way of a socket grub screw.

Features:

- Substantially reduced on-site labour, with no conduit threading required.
- Allows more efficient use of skilled labour.
- 12.9 Grade, Serrated socket grub screw, to give maximum earth continuity.
- "Socket Pin" Security grub screws can be supplied on request.
- Can be used on existing installations.
- Conforms to BS EN 61386-21:2004, Test certificates can be supplied on request
- The conlok system is the only system to supply the complete range of 20mm and 25mm accessories.
- Through time trials the conlok system has been proved to reduce labour by a staggering 75%

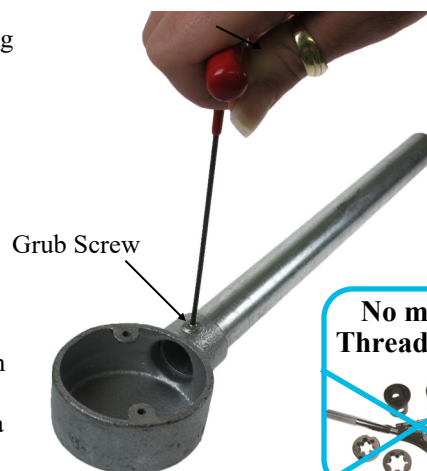

CODE	DESCRIPTION	UNIT
CL3G	20mm Conlok Angle Box	each
CL10G	25mm Conlok Angle Box	each

CL2G	20mm Conlok Through Box	each
CL9G	25mm Conlok Through Box	each

CL1G	20mm Conlok End Box	each
CL8G	25mm Conlok End Box	each

CL4G	20mm Conlok Tee Box	each
CL11G	25mm Conlok Tee Box	each

CL20C	20mm Conlok Coupler	each
CL25C	25mm Conlok Coupler	each

CL20GA	20mm Conlok Adaptor	each
CL25GA	25mm Conlok Adaptor	each

CL20MB	20mm Conlok Sweep Bend	each
CL25MB	25mm Conlok Sweep Bend	each

CLKEY	Conlok Allen Key	each
-------	------------------	------

SEPHM46	Snake eye Pan Head M4 x 6mm	Box/100
SETH5	TH5 Snake Eye Driver Insert	each

For use with the conduit fittings / accessories if security required