

The Pro Tape range



















Durable labels built for trade professionals





Introducing the Pro Tape range

4 Tested to the extreme

5 Strong adhesive tape

6 Flexible ID tape

7 New self-laminating tape

8 Security tape

9 Heat shrink tube

10 Flag label

11 Stencil tape

12 Choose the right tape for the job

13 P-touch label printer compatibility

14/15 Available Pro Tape widths and colours

P-touch Pro Tapes are built with tough and durable professional grade materials and adhesives.

Choose the right tape for the job using this guide.



New




MARK OF A SMART

PROFESSIONAL

Tapes that are tested to the extreme

Brother P-touch laminated labels have been built to last, wherever you use them. With excellent resistance to water, abrasion, chemicals, fading and temperature extremes, they'll never let you down. Meaning when you label something on-site, it stays labelled.

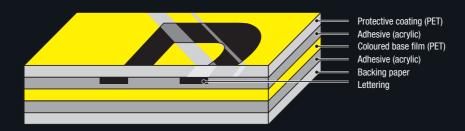



Laminated Temperature Resistant



Water Resistant



nt



Fade Resistant



Abrasion Resistant



Chemical Resistant



Strong Adhesion



Our laminated tape technology

Laminated TZe tapes consist of six layers of materials, resulting in a thin, extremely strong label. Characters are formed with a thermal transfer ink and sandwiched between two protective layers of PET (polyethylene film). The result is a virtually indestructible label that can withstand even the toughest conditions.

TZe Strong adhesive laminated

For smooth, rough, textured and powder coated surfaces. With three times more strength on textured surfaces, than Brother standard tape on average.

Recommended for:

- Warning signs and notices
- Distribution boards
- Consumer units
- Control gear and switch gear
- Electrical sockets and faceplates
- Electrical trunking and conduits

- Solar panels
- EV car charging points
- Racks
- Ports
- Patch panels
- Equipment and telecommunications outlets
















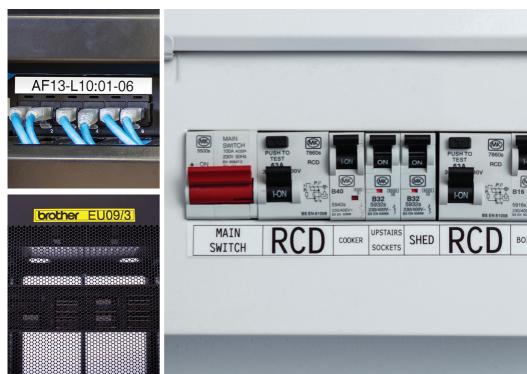

TZe Flexible ID laminated

With a specially formulated adhesive to wrap securely around wires and cables with a diameter of 3mm or larger. Barcodes and other detailed information can be included on cable flags.

Recommended for:

- Electrical wires and cables
- Power cords
- LAN cables (patch cord or permanent link)
- Computer cables (USB cables, data cables)



















TZe Self-laminating*

Provides a protective layer over the printed area for cable marking. With our cost saving solution, text is laminated during printing which means 24mm tape is suitable for the larger diameter CAT6A cables.

Recommended for:

- LAN cables (patch cord or permanent link)
- Computer cables (USB cables, data cables)
- Power cords

Ø3.0mm - 6.6mm (24mm), Ø3.0 - 10.4 (36mm)

















*Feature available on PT-E550W, PT-P900W, PT-P950NW and PT-D800W. Firmware update is required. Download at https://support.brother.com/

TZe Security laminated

When the label is peeled, it leaves behind a 'checkerboard' pattern indicating the label has been tampered with.

Recommended for:

- Equipment after calibration
- Computers electronic devices
- Other company property and assets
- Items sealed for security



HSe Heat shrink tube


Printable tube, when shrunk down it ensures a secure fit on wires and cables. Shrink ratio 2:1.

Recommended for:

- Electrical wires
- Cables

See page 12 for recommended cable diameters

UL recognised as a component to UL224 Continuous temperature rating: 125°C Voltage rating: 300V Flammability rating: VW-1

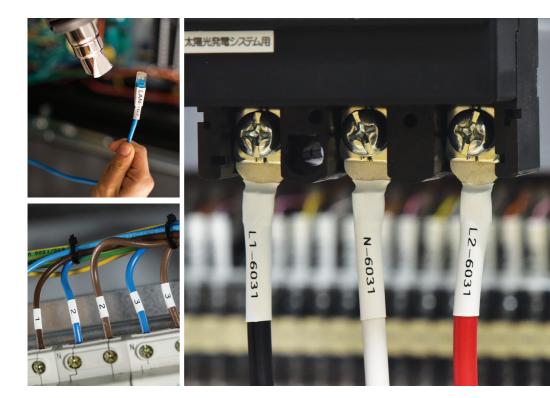

FLe Flag

Die-cut non-laminated flag label. New improved single label design makes it very simple to apply once printed. Wide printable area for barcodes and other information.

Recommended for:

- LAN cables (patch cord, permanent link, CAT5e, CAT6)
- Fibre optic cables

Ø2.0mm - 8.0mm



STe Stencil

Non-adhesive tape used as a mask to permanently mark (etch) conductive surfaces using electrolytic marking chemicals and equipment, or to mark (etch) glass using a glass etching paste.

Recommended for:

- Use on metallic and glass surfaces
- Permanent part marking (e.g. aerospace industry, motor industry, manufacturing, medical/healthcare)
- Product marking and customisation (e.g. scissors, knives)



Choose the right tape for the job

	Wir	e and cable	e identificati	General identification					
Surface	Flexible ID	Self-laminating*	Heat shrink tube	Flag	Strong adhesive	Security	Stencil		
Smooth surfaces	~				~	~	~		
Textured surfaces	•				~	•			
Cable wrap	~	~	~						
Cable flag	~			~					

Heat shrink tube	Таре	Width	Recommended cable diameters
	HSe-211	5.8mm	Ø1.7mm to 3.2mm
	HSe-221	8.8mm	Ø2.6mm to 5.1mm
the state of the s	HSe-231	11.7mm	Ø3.6mm to 7.0mm
	HSe-241	17.7mm	Ø5.4mm to 10.6mm
/ / 11	UCo 251	00 6mm	07 2mm to 14 2mm

Recommended

Acceptable

P-touch label printer compatibility

		Tape type										
Model	Max tape width	Strong adhesive	Flexible ID	Security	Heat shrink tube	Self-laminating*	Flag	Stencil				
PT-E110	12mm	~	~									
PT-E300	18mm	~	~	~	~							
PT-E550W	24mm	~	~	~	~	~						
PT-D800W	36mm	~	✓	~	~	~	~	~				
PT-P900W PT-P950NW	36mm	~	~	~	✓	~	~	~				

Pro Tape widths and colours

TZe Strong adhesive laminated - 8m	6mm	1	9mm	1	12mm	1	18mm	1	24mm	Ī	36mm
Black on white	TZe-S211		TZe-S221		TZe-S231		TZe-S241		TZe-S251		TZe-S261
Black on transparent			TZe-S121		TZe-S131		TZe-S141		TZe-S151		
Black on yellow			TZe-S621		TZe-S631		TZe-S641		TZe-S651		
TZe Flexible ID laminated - 8m											
Black on white	TZe-FX211		TZe-FX221		TZe-FX231		TZe-FX241		TZe-FX251		TZe-FX261
Black on yellow	TZe-FX611		TZe-FX621		TZe-FX631		TZe-FX641		TZe-FX651		TZe-FX661
'Ze Self-laminating* - 8m											
Black on white									TZe-SL251		TZe-SL261
Black on yellow									TZe-SL651		TZe-SL661
Black on white							TZe-SE4		TZe-SE5		
Black on white							STe-141		STe-151		STe-161
Le Flag (die-cut) - 72 labels											
Black on white									FLe-2511**		
Black on yellow									FLe-6511**		
Black on green									FLe-7511**		
ISe Heat shrink tube - 1.5m	5.8mm	1	8.8mm	1	11.7mm	<u> </u>	17.7mm	I	23.6mm		
Black on white	HSe-211		HSe-221		HSe-231		HSe-241		HSe-251		



^{*}Feature available on PT-E550W, PT-P900W, PT-P950NW and PT-D800W. Firmware update is required. Download at https://support.brother.com/
**Labels are: 45mm x 21mm when printed. 45mm x 10.5mm once applied.



brother at your side



Contact:

www.brother.co.uk

Brother UK Ltd

Shepley Street, Audenshaw, Manchester, M34 5JD. Tel: +44 (0) 333 777 4444

Tel: +44 (0) 161 931 2218

All specifications correct at the time of printing (September 2020) and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies. CD3554.