


Quick Installation Guide

Package Contents

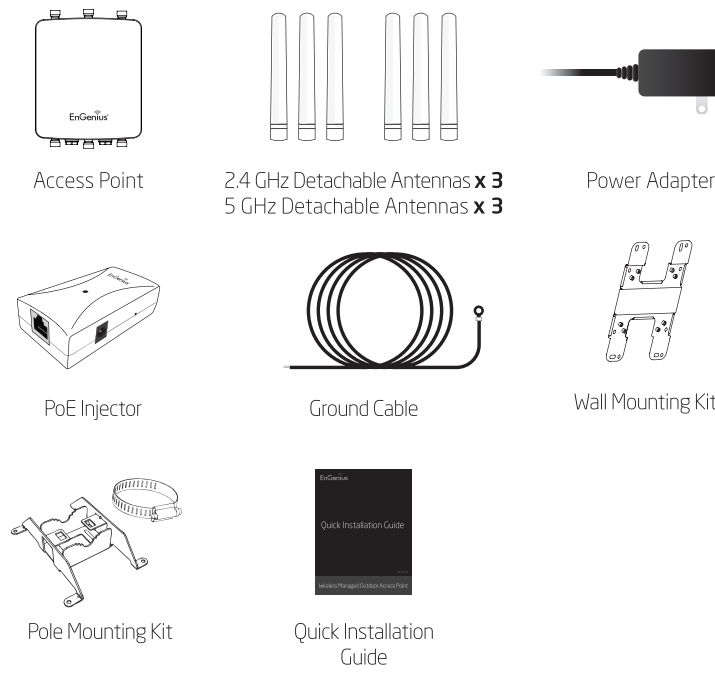

Minimum Requirements


- Broadband Internet Service (Cable or DSL Modem)
- Internet Browser (Internet Explorer, Safari, Firefox, Chrome)

Managed Access Point Installation with Wireless Management Switch

1 Connecting the Access Point (Through EnGenius Management Switch)


- Connect one end of the Ethernet Cable into the main LAN Port (PoE) of the Managed Access Point and the other end to the Ethernet Port on the Wireless Management Switch.
- Connect another Ethernet Cable into an Ethernet Port on the front panel of the EnGenius Wireless Management Switch and the other end to the Ethernet Port on the computer.
- Screw on the provided antennas to the device as shown in illustration below.

Note: The Access Point supports both IEEE 802.3at PoE (Power over Ethernet) or the included power injector. You may use either one as the power source. **DO NOT** use both at the same time.

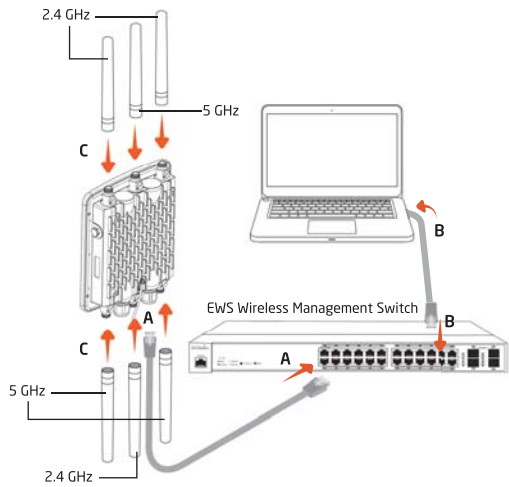

2 IP Address Configuration

- Once your computer is on, ensure that your TCP/IP is set to **On** or **Enabled**. Open Network Connections and then click **Local Area Connection**. Select **Internet Protocol Version 4 (TCP/IPv4)**.

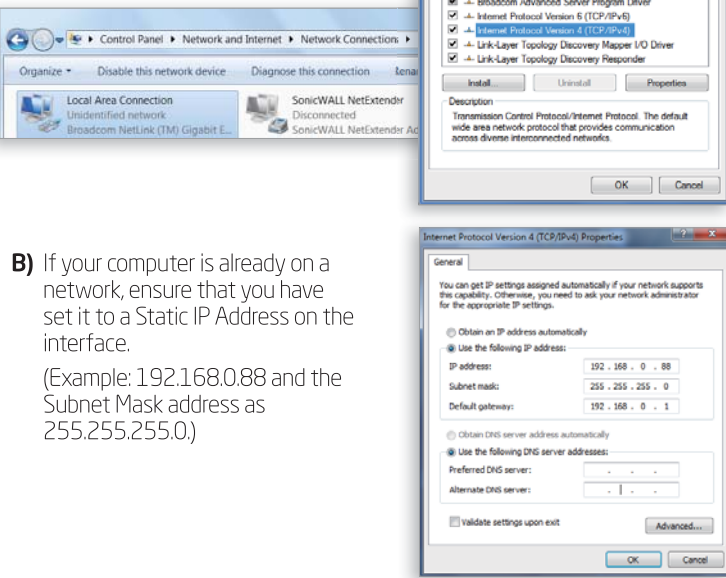


Stand-alone Access Point Installation

1 Connecting the Access Point


- Connect one end of the Ethernet cable into the **main LAN port** (PoE) of the Access Point and the other end to the **AP Ethernet port** on the PoE injector.
- Connect the **Power Adapter** to the **DC-IN** port of the PoE injector and plug the other end in to an electrical outlet.
- Connect the second Ethernet cable into the **LAN port** of the PoE injector and the other end to the Ethernet port on the EWS Switch.
- Screw on the provided antennas to the device as shown in illustration below.

Note: The Access Point supports both IEEE 802.3at PoE (Power over Ethernet) or the included power injector. You may use either one as the power source. **DO NOT** use both at the same time.

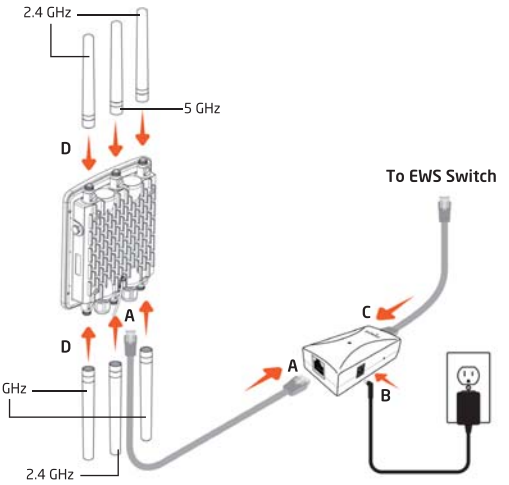

2 IP Address Configuration

- Once your computer is on, ensure that your TCP/IP is set to **On** or **Enabled**. Open Network Connections and then click **Local Area Connection**. Select **Internet Protocol Version 4 (TCP/IPv4)**.

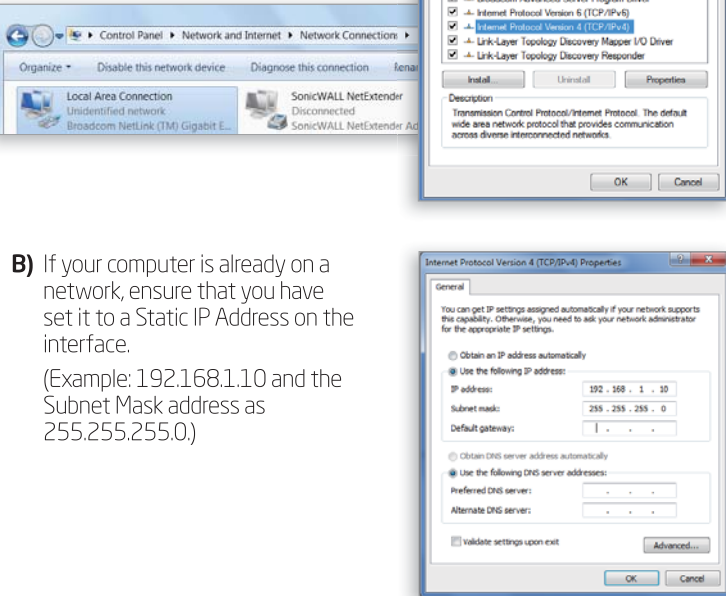


Technical Support

Country of Purchase	Service Center	Service Information
North America www.engeniustech.com	Canada Los Angeles, USA	Canada rma@engeniustech.com Toll Free: (+1) 888 397 2788 Local: (+1) 905 940 8181 USA support1@engeniustech.com Toll Free: (+1) 888 735 7888 Local: (+1) 714 432 8668
Central & South America es.engeniustech.com pg.engeniustech.com	Miami, USA	miamisupport@engeniustech.com Miami: (+1) 305 887 7378 Sao Paulo, Brazil: (+55) 11 3957 0303 D.F. Mexico: (+52) 55 1163 8894
Europe www.engeniustech.com	Netherlands	support1@engeniustech.com (+31) 40 8200 887
Africa CIS Middle East Russia www.engeniustech.com	Dubai, UAE	support1@engeniustech.com Toll Free: UAE: 800-EnGenius 800-364-364-97 General: (+971) 4 357 5599
Asia Oceania www.engeniustech.com	Singapore	www.engeniustech.com.sg/e_warranty_form techsupport@engeniustech.com.sg Toll Free: Singapore: 1800 364 3648
Others www.engeniustech.com	Taiwan, R.O.C	technology@sena.com


3 Management Switch Setup

- Open a web browser on your computer. In the address bar of the web browser, enter **192.168.0.239** and **enter**.
- A login screen will appear. By default, username is **admin** and the password is **password**. Enter the current username and password of the Wireless Management Switch and then click **Login**.

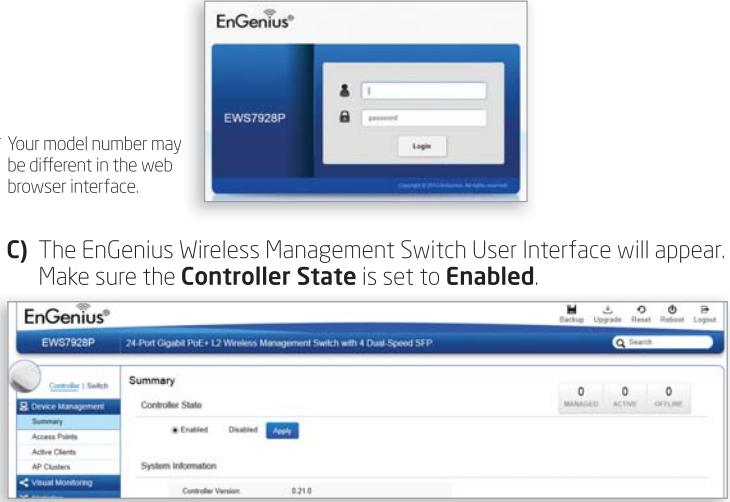

Access Point Setup

- Open a web browser on your computer. In the address bar of the web browser, enter **192.168.1.1** and **enter**.
- A login screen will appear. By default, the username of the Access Point is **admin** and the password is **admin**. Enter the current username and password of the Access Point and then click **Login**.

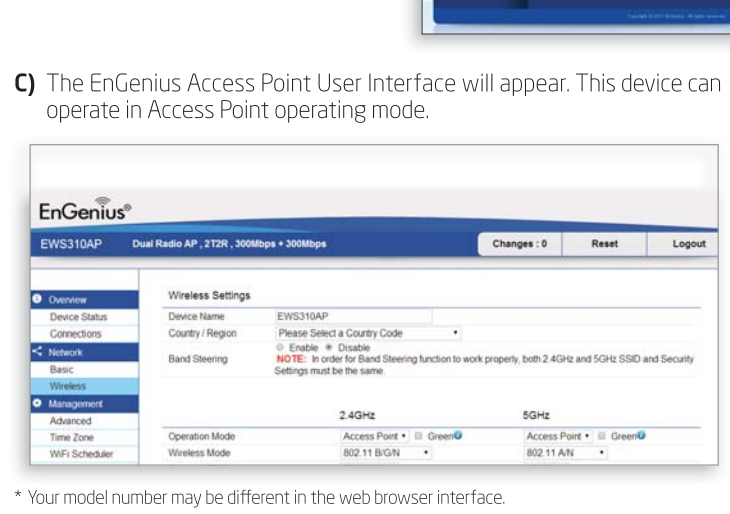


Notes

Maximum data rates are based on draft IEEE 802.11ac and/or IEEE 802.11n standards. Actual throughput and range may vary depending on many factors including environmental conditions, distance between devices, radio interference in the operating environment, and mix of devices in the network. Features and specifications subject to change without notice. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2013 EnGenius Technologies, Inc. All rights reserved.

4 Adding Managed AP (Through EnGenius Wireless Management Switch GUI)


- All Managed AP(s) connected to the same network as the Wireless Management Switch will appear on the right side of the screen, under the Access Point **AP(s) Detected** list. Locate and select the Managed AP by checking the box and click **Add** to manage the device.

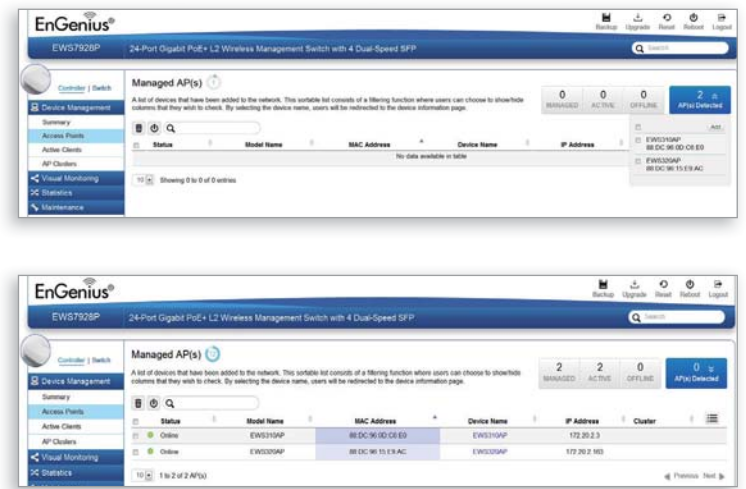


- You may configure your Managed AP(s) after you successfully connected to the Wireless Management Switch through its **GUI**.

5 Configuring Managed AP (Through EnGenius Wireless Management Switch GUI)

- Configure Managed AP(s) through the GUI interface from the switch for WLAN settings under **Device Management**. Click the "Device Name" in order to configure your Managed AP.

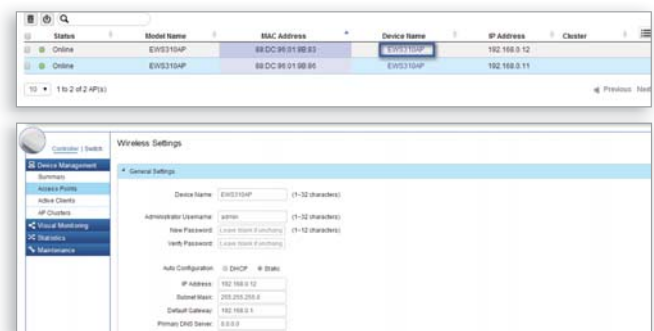


- Add Managed AP(s) to specific **AP Cluster** to save repetitive configuration tasks.

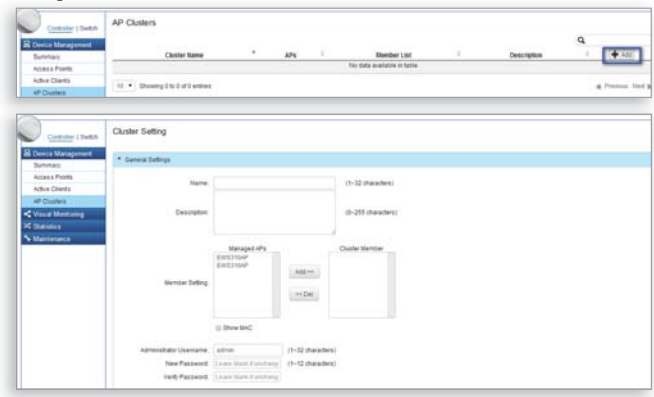

- Users may create several clusters simultaneously to accommodate their deployments under **AP Clusters**.




- For distinct settings, EnGenius Wireless Management switches still offer individual Managed Access Point customization for cluster members such as different channels that best adapt your local WLAN deployments.

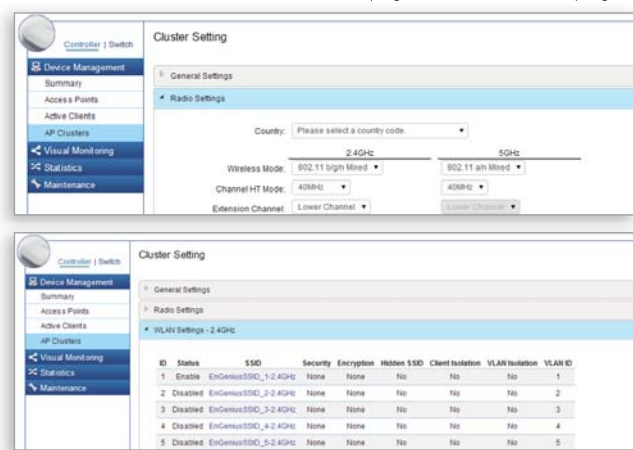


- Upon successful connection and setup, user can go through different sections on the web management pages to unleash Managed AP's full features for your WLAN deployment and performance monitoring.

- Attach the device onto the wall by tightening the bolt's flat washers and nuts to secure the mounting base to the mounting surface.

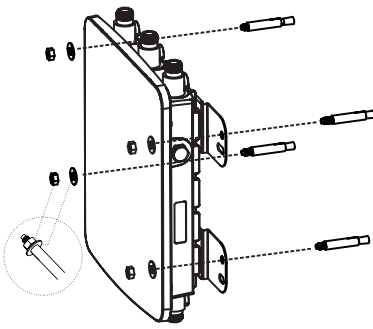


Pole Mounting The AP


- Place the lock and flat washer on the cap screws and drive the screws to attach the mounting base to the back of the Access Point.



- Determine which placement to be assembled. Drive the four round head screws to attach the Pole Mount Bracket to the mounting base.

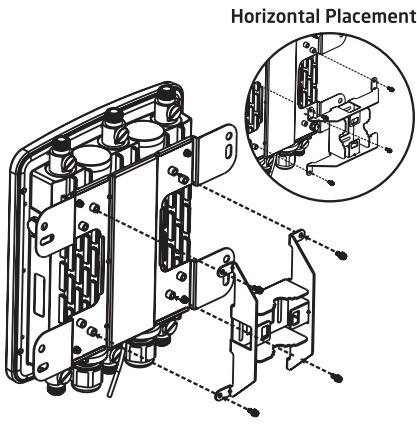

- Thread the open end of the Pole Strap through the two tabs on the Pole Mount Bracket.

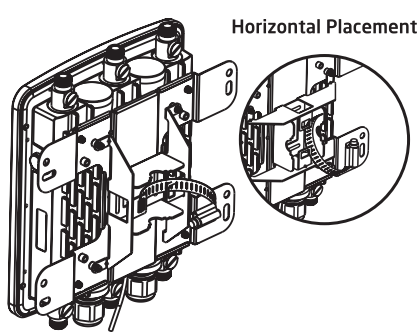

- Determine where the AP is to be fastened. Lock and tighten Pole Strap secure Pole Mount Bracket to the pole.

